





Comfortable **ME**



for a greener tomorrow

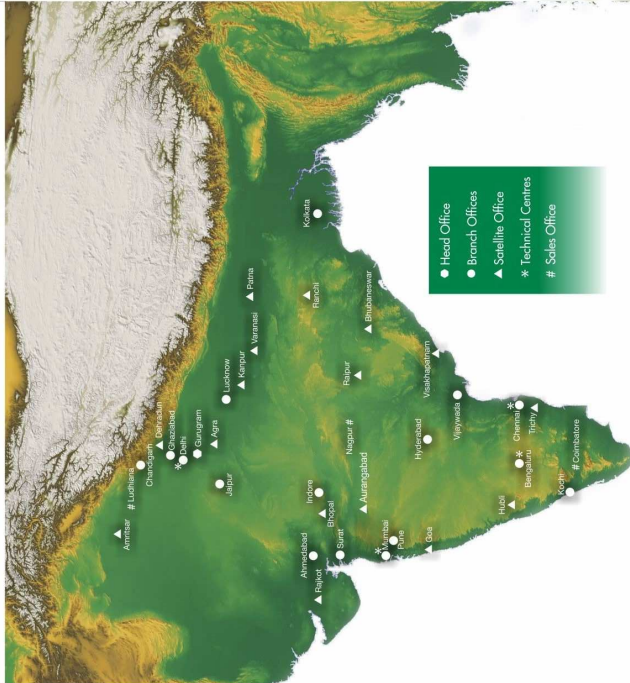

- Head Office
- Branch Offices
- ▲ Satellite Office
- * Technical Centres
- # Sales Office

MITSUBISHI ELECTRIC INDIA PVT. LTD.

HEAD OFFICE: 2nd Floor, Tower A & B, DLF Cyber City, DLF Phase 3, Gurgaon - 122002 (Haryana)
Tel. No. (Main) 0124-4932000

Customer Care Toll Free No - 1800 102 2626

TECHNICAL CENTERS: Bangalore - 080-40201600; Chennai - 044-49222222; Delhi - 011-55057500; Mumbai - 022-46112000

BRANCH SALES OFFICES: Ahmedabad - 079-65120063; Bangalore - 080-40201600; Coimbatore - 0422-4385600; Chandigarh - 0172-4601646;

Chennai - 044-49222222; Delhi - 011-65057500; Guwahati - 0361-2531034; Hyderabad - 040-4343888; Indore - 0731-4689891; Jaipur - 0141-

4011108; Kolkata - 0903060553; Kochi - 0484-4620933; Lucknow - 0522-4002607; Ludhiana - 0181-4001694; Mumbai - 022-46112000;

Nagpur - 0712-2284026; Panaji - 020-27102000; Surat - 0261-4003111; Vijaywada - 0866-8516966.

SATELLITE OFFICES: Kara - 08558900140; Amritsar - 018780021037; Anwarabad - 8622330333; Bhopal - 0662542722;

Bhubaneswar - 06702546937; Dehradun - 08650189786; Goa - 0816713443; Haldwari - 08446388010; Kanpur - 05205687322; Pune - 06801488223;

Rajpur - 08446397997; Raipur - 09566605008; Ranchi - 07732927010; Trichy - 09205690222; Varanasi - 05559302666; Vijay - 09561656566

For E-waste Collection & Disposal process, Customer can get complete details of company process on collection, disposal of e-waste product (i.e. Mitsubishi Electric make Air Conditioner / Printer) and incentive / exchange scheme for returning of e-waste on Company website

www.mitsubishielectric.in or toll free number 1800 102 2626.

Specifications are subject to change without prior notice.

June 2016

MITSUBISHI ELECTRIC

AIR CONDITIONERS

GK SERIES SPECIFICATIONS

Indoor Unit		MS-GK10VA	MS-GK13VA	MS-GK18VA	MS-GK24VA	
Outdoor Unit		MU-GK10VA	MU-GK13VA	MU-GK18VA	MU-GK24VA	
Power Supply	Source	Outdoor Power supply				
	Outdoor(V/Phase/Hz)	230V/SinglePhase/50Hz				
Function						
Cooling Only						
Capacity	Rated	kW	2.7	3.6	5.2	6.6
	TR	TR	0.75	1.0	1.5	2.0
Total Input	Rated	kW	0.740	1.000	1.450	1.850
EER			3.65	3.60	3.59	3.57
Sound Level (SPL)	Indoor Unit (Lo/Mid/Hi/Sti)	dB(A)	26/32/38/44	29/36/42/46	35/41/47/53	37/42/47/53
Air Volume	Indoor Unit	CFM	448	477	777	777
Operating Current		A	3.3	4.5	6.4	8.2
Indoor Unit	Dimensions	H*W*D	290 x 799 x 232		325 x 1100 x 238	
	Weight	kg	9		16	
Outdoor Unit	Dimensions	H*W*D	525 x 718 x 255		550 x 800 x 285	
	Weight	kg	24.5		33.5	
	Breaker Size (MCB required)	A	10		15	
Ext.Piping	Diameter	Liquid/Gas	6.35 / 9.52		6.35 / 12.7	
	Max.Length	Out-In	20		20	
	Max.Height	Out-In	10		10	
Refrigerant			R410A	R410A	R410A	R410A
BEE Star Rating						